



A WORLD LEADER IN FUME
EXTRACTION TECHNOLOGY

AD 1000 iQ

Last Updated on 08.04.2021



High performance laser fume extraction system for applications in laser marking, coding and engraving.

BOFA's AD 1000 iQ high end laser extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance is enhanced with the inclusion of several features including BOFA's patented DeepPleat DUO pre-filter and the acclaimed iQ Operating System. These take performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

More information about the [Intelligent Operating System \(iQ\)](#).

Technology

- Intelligent Operating System (iQ)
- DeepPleat DUO pre-filter
- HEPA filter
- Automatic flow control (AFC) technology
- Reverse flow air (RFA) technology
- Advanced carbon filter (ACF) technology
- Patented technology
- ProTECT service plan
- SureCHECK quality standard

Key features of the AD 1000 iQ

iQ Operating System
Standard

Reverse flow air filter technology
Standard

High airflow and pressure rates
Standard

DeepPleat DUO pre-filter
Standard

Contact BOFA at <https://bofainternational.com/en/contact/>

<https://bofainternational.com/en/portal/datasheets/ad-1000-iq/>



Automatic flow control system

Standard

High contrast display

Standard

Remote diagnostics via USB

Standard

Combined HEPA/Gas filter incorporating ACF technology

Standard

VOC gas sensor (Volatile Organic Compound)

Optional

Filter change / System fail signal

Optional

Optional filter medias

Optional

Real time airflow reading

Standard

'Run safe' operation

Standard

Independent filter condition monitoring, display and warnings

Standard

Filters with long life and low replacement cost

Standard

Remote stop / start interface

Optional

Interfacing with host laser

Optional

Technical specification

1. iQ display

2. On / off switch

3. Power cable

4. Signal / interface cable

5. Castors

6. Door hinge

7. Hose inlet connection - 125mm


8. Exhaust outlet

9. Motor cooling inlet



10. Door latch

11. Motor cooling outlet

12. Standby button

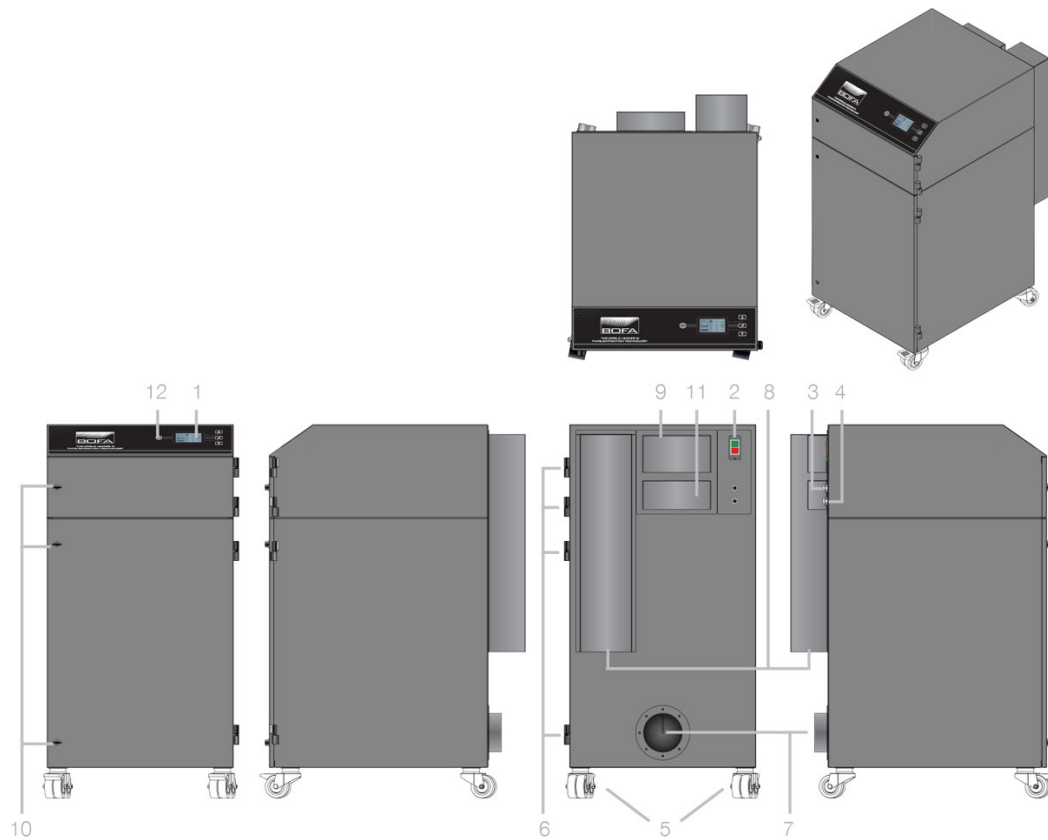

Airflow through filters

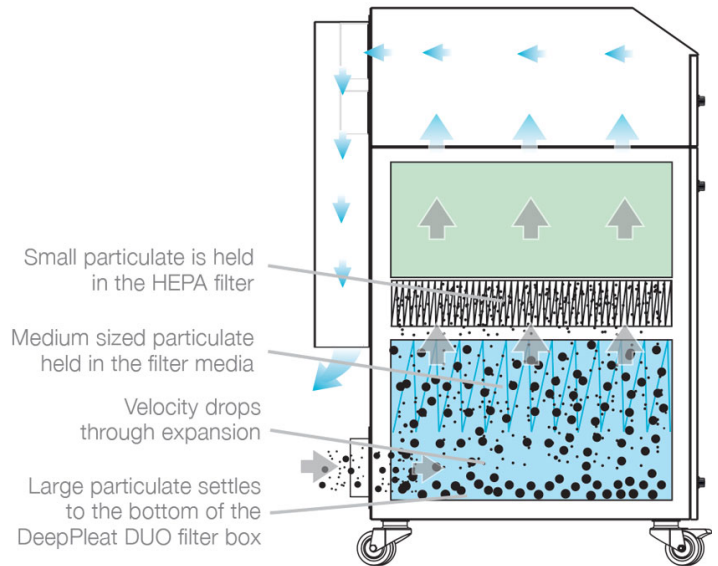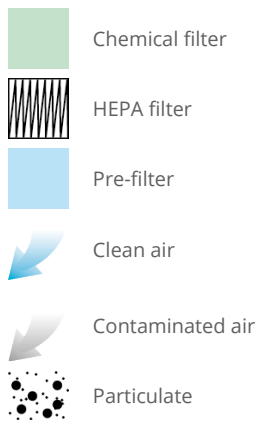

Technical data

	EU	US
Dimensions (HxWxD)	1205 x 615 x 790mm	47.44 x 24.21 x 31.10"
Cabinet construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel 500cfm / 100mbar
Airflow / pressure	850m ³ /hr / 100mbar	500cfm / 100mbar
Electrical data	230v Single-phase 1~ 50/60Hz Full load current: 12.8 amps / 2.2kw	115v 60/50Hz Full load current: 19.5 amps / 2.2kw
Noise level	< 63dBA (at typical operating speed)	< 63dBA (at typical operating speed)
Weight	140kg	309lbs
Approvals	UKCA and CE	cUL, UL*

DeepPleat DUO pre-filter specifications

Surface media area	30m ² approx (322.8ft ²)
Filter media	Borosilicate
Filter media construction	Maxi fold construction with webbing spacers
Filter housing	Zintec mild steel
Filter efficiency	95% @ 0.9 microns
Inlet size	125mm (0.41ft)
Dropout chamber size	58 litres
Filter media pleat size	200mm (0.65ft)

Combined filter HEPA/Gas specifications

Surface media area	7.5m ² approx (80.7ft ²)
HEPA filter media	Borosilicate
HEPA media construction	Maxi pleat construction with glue bead spacers
Filter housing	Zintec mild steel

Combined filter HEPA/Gas specifications

Treated activated carbon	34kgs (74.8 lbs)
Filter efficiency	99.997% @ 0.3 microns

Unit part numbers

Model	Voltage	Part No.	24V stop / start	Filter change / System failure signal	VOC monitoring	On-board compressor
AD 1000 iQ powder coated	230V	L0762	A2001	A2002	A2003	A2007
AD 1000 iQ powder coated	115V	L0761	A2001	A2002	A2003	A2007
AD 1000 iQ stainless steel	230V	L0772	A2001	A2002	A2003	A2007
AD 1000 iQ stainless steel	115V	L0771	A2001	A2002	A2003	A2007

Replacement filter part numbers

Model	DeepPleat DUO pre-filter	Combined HEPA/Gas filter
AD 1000 iQ	A1030222	A1030297

* Tested to UL and cUL standards, but testing may be provided by alternate nationally recognised test laboratories. Certain product configurations may affect the UL certification. Please speak to your sales representative.

Other languages

AD 1000 iQ

[German](#)

AD 1000 iQ

[Japanese](#)

AD 1000 iQ

[French](#)

AD 1000 iQ

[Chinese](#)

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.



REPRESENTED BY:
Keystone Prototyping Solutions
320 East 3rd Avenue
Tarentum, PA 15084
Phone: 844-959-0100
www.keystoneprototypingsolutions.com